



FAST HEAT: HEATER WIRING DIAGRAMS

**5-ZONE / 10-PIN
STANDARD HEATER**

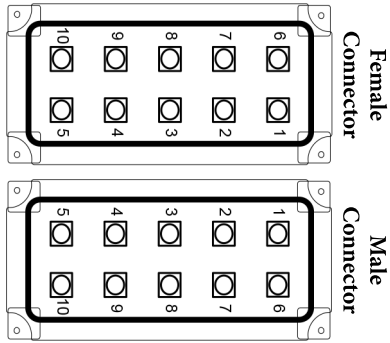


ZONE	CONN PIN	POLARITY
1	1	HOT
1	6	RET
2	2	HOT
2	7	RET
3	3	HOT
3	8	RET
4	4	HOT
4	9	RET
5	5	HOT
5	10	RET

**8-ZONE / 16-PIN
STANDARD HEATER**

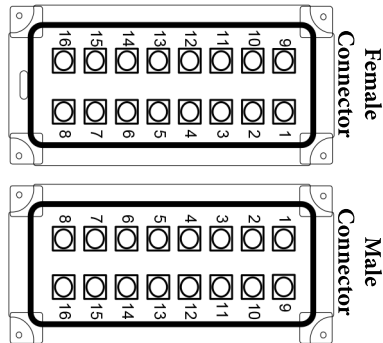


ZONE	CONN PIN	POLARITY
1	1	HOT
1	9	RET
2	2	HOT
2	10	RET
3	3	HOT
3	11	RET
4	4	HOT
4	12	RET
5	5	HOT
5	13	RET
6	6	HOT
6	14	RET
7	7	HOT
7	15	RET
8	8	HOT
8	16	RET

**12-ZONE / 24-PIN
STANDARD HEATER**

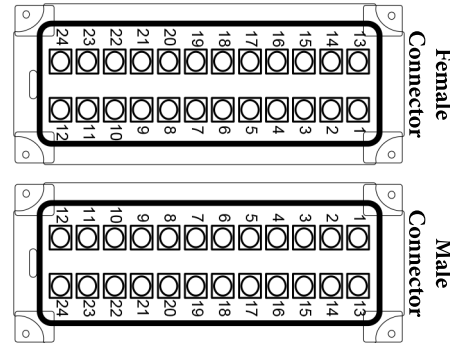

ZONE	CONN PIN	POLARITY
1	1	HOT
1	13	RET
2	2	HOT
2	14	RET
3	3	HOT
3	15	RET
4	4	HOT
4	16	RET
5	5	HOT
5	17	RET
6	6	HOT
6	18	RET
7	7	HOT
7	19	RET
8	8	HOT
8	20	RET
9	9	HOT
9	21	RET
10	10	HOT
10	22	RET
11	11	HOT
11	23	RET
12	12	HOT
12	24	RET

**12-ZONE / 25-PIN
STANDARD HEATER**

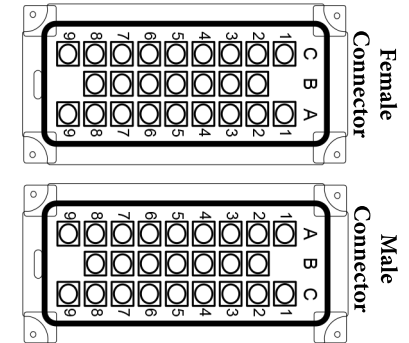

ZONE	CONN PIN	POLARITY
1	A1	HOT
1	A2	RET
2	A3	HOT
2	A4	RET
3	A5	HOT
3	A6	RET
4	A7	HOT
4	A8	RET
5	B2	HOT
5	B3	RET
6	B4	HOT
6	B5	RET
7	B6	HOT
7	B7	RET
8	C1	HOT
8	C2	RET
9	C3	HOT
9	C4	RET
10	C5	HOT
10	C6	RET
11	C7	HOT
11	C8	RET
12	A9	HOT
12	C9	RET

The Highest Quality Parts Start with Fast Heat Custom Cables & Connectors.
Need help finding something? Give us a call today at 630.359.6300.

